


DESCRIPTION

Concrete per batch: 10 cu. yd. CPMB

This model is designed to be transported in a single freight, with transport system integrated. The cement silo folds when in transport mode. It can manage 3 aggregates and has a 44 Ton silo included.

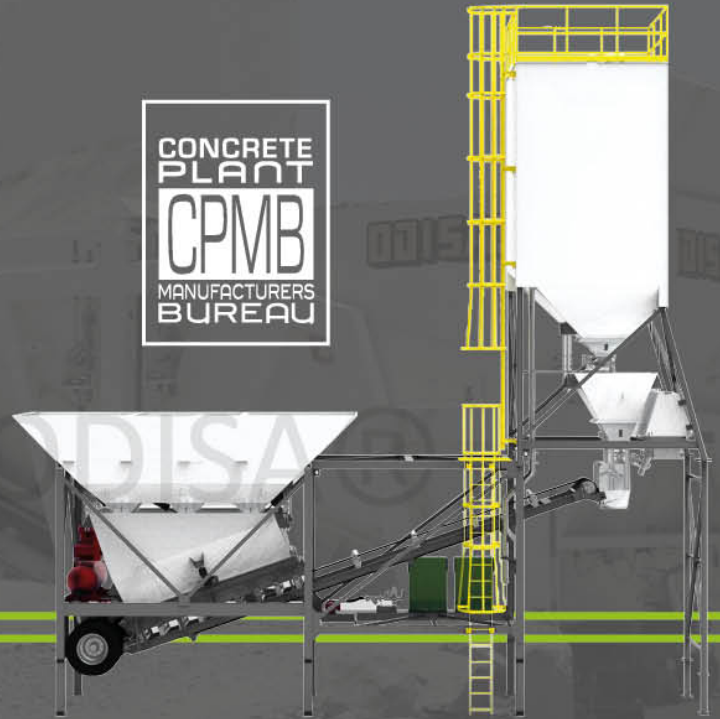

CPMB CERTIFIED MEMBER

MODEL 10 Features



Concrete output per hour	117 cu. yd. / 90 m3
Concrete per batch (CPMB)	10 cu. yd. / 7.6 m3
Aggregate batchers	1
Aggregate batcher capacity	14 cu. yd. / 11 m3
Aggregate bin	39 cu. yd. / 53 Ton
Aggregate compartments	3
Cement silo	44 Ton
Cement batcher	10 cu. yd. concrete per batch CPMB
Automatic batch control	Ready for any brand
Plant certification	CPMB (Concrete Plant Manufacturers Bureau)

AGGREGATE BATCHER

10 cu. yd. of concrete per batch CPMB (14 cu. yd. aggregate capacity), includes tension load cells and digital display.

AGGREGATE BIN

39 cu. yd. / 53 Ton capacity. CPMB rated, 3 Discharge gates, three compartments in "Line" configuration.

CEMENT STORAGE

44 Ton CPMB rated single compartment bin, 4" delivery pipe - includes atmospheric vent and aeration system. Fly ash additional compartment available.

CEMENT BATCHER

10 cu. yd. concrete per batch CPMB rated, tension load cells, aeration pads, 10" butterfly discharge valve and atmospheric vent.

BATCH BELT

30" Wide, 350 FPM, 15 H.P. With back stop drive and adjustable belt cleaner.

WATER SYSTEM

3" water meter, 360 GPM.

AIR SYSTEM

High pressure 10 H.P. (26.5 cu. ft./min.), Two-Stage Air Compressor with 500 liters tank.

POWER PANEL

440 Volt Power Panel – Includes Thermo-Magnetic Starters for Batch Belt and Air Compressor.

CONTROLS

110 V. Separated from the Batch Plant with quick connector cables, Manual Electric Push button Controls for: Cement Aeration, discharge gates and a 6-Digit manual set water counter.

TRANSPORT SYSTEM

22,000 pounds with 4 wheels, brakes, stop lights and King Pin included.

OPTIONS

Dust collectors / Auxiliary cement silos / Automatic Batch Control / Other Options

